

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 October 2002 (31.10.2002)

PCT

(10) International Publication Number
WO 02/087106 A1

(51) International Patent Classification⁷: **H04B 7/005**

(21) International Application Number: **PCT/EP01/04622**

(22) International Filing Date: **24 April 2001 (24.04.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(71) Applicant (for all designated States except US): **NOKIA CORPORATION [FI/FI];** Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KYÖSTI, Pekka [FI/FI];** Uistintie 4 A 9, FIN-90550 Oulu (FI).

(74) Agent: **EISENFÜHR, SPEISER & PARTNER;** Arnulfstr. 25, 80335 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **METHOD AND DEVICE FOR ESTIMATING SIR OF A SIGNAL**

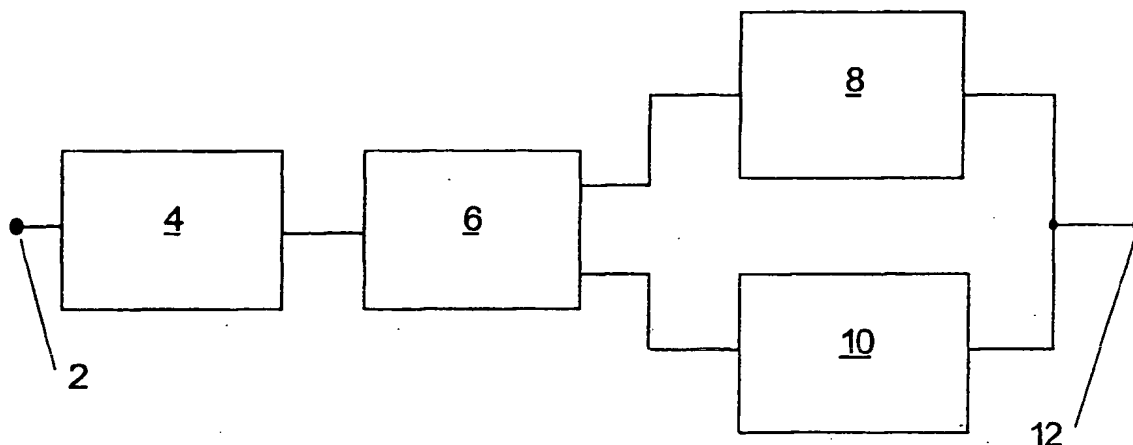

(57) Abstract: Disclosed is a method and a device for estimating the signal to interference ratio of a signal, in particular in a base station of a WCDMA system, providing at least a first estimating process and a second estimating process, wherein for current use with the signal a selection among said estimating processes is made in accordance with a current characteristic or current characteristics of said signal so that an estimating process is selected which is most suitable in view of the current characteristic(s) of said signal.

WO 02/087106 A1

Method and device for estimating SIR of a signal

FIELD OF THE INVENTION

5 The present invention relates to a method and a device for estimating the signal to inference ratio (SIR) of a signal, in particular in a base station of a wideband code division multiple access (WCDMA) system where the method and the device are used for a radio links.

BACKGROUND OF THE INVENTION

10 SIR must be evaluated in the receiver of WCDMA systems. A good estimate of SIR is needed mainly for fast power control and also for radio resource management. Implementation point of view is that the SIR estimation should be computationally as simple as possible since it has to be done every time slot for every radio link connection.

The estimation of SIR requires the estimation of signal power and of interference power. There are two main categories of methods to estimate SIR, namely one with wideband interference estimation and another with narrowband interference estimation. The wideband interference estimation is calculated from the wideband signal which is the signal before despreading. The narrowband interference estimation is calculated from the narrowband signal which is the signal after despreading. In the following, both methods are introduced shortly, by describing one possible implementation of these methods (although there are further possible implementations which, however, are not mentioned here):

1. SIR estimation with wideband interference estimate:

The signal to interference ratio is described by the following equation:

30

$$SIR = \frac{SF_{DPCH} \cdot S}{I_o + I_r} \quad (1)$$

where

- S is the received signal power of a dedicated physical control channel (DPCCH),
- 5 - SF_{DPCCH} is the processing gain of the DPCCH channel,
- I_r is the wideband interference originating from own cell,
- I_o is the wideband interference from other cells including the system thermal noise.

Equation (1) needs the estimation of the signal power and the interference power.

10

The signal power is calculated from despread pilot symbols separately for each antenna using the following equation:

$$\hat{S} = \sum_{k=1}^L \hat{S}_k = \sum_{k=1}^L \left| \frac{1}{N_p} \sum_{i=1}^{N_p} z_{k,i} \right|^2 \quad (2)$$

15

where

- L is the number of allocated fingers for current antenna (number of received paths),
- N_p is the number of pilot symbols,
- 20 - z is the sample of the DPCCH channel from which the pilot modulation is removed,

Samples z are complex values and there are N_p number of them. It has to be noted that the signal power estimate \hat{S} is biased by the second term in the following equation:

25

$$E(\hat{S}) = S + \frac{(I_o + I_r) \cdot L}{N_p \cdot SF_{DPCCH}} \quad (3)$$

The wideband power per antenna is calculated from the received signal by the following equation:

$$\hat{P}_w = \frac{1}{N} \sum_{i=1}^N |r_i|^2 \quad (4)$$

where

- N is the number of samples in one time slot,
- 5 - r is the sample of the received signal after a pulse shape filter and AGC on current antenna.

The interference for equation (1) is obtained from wideband power measurement using the following equation:

10

$$E(\hat{P}_w) = S + I_o + I_r \quad (5)$$

So, the SIR estimate for one antenna is calculated by the following equation:

15

$$\hat{SIR} = SF_{DPCCH} \cdot \frac{\hat{S} - \frac{L}{N_p \cdot SF_{DPCCH}} \cdot \hat{P}_w}{\hat{P}_w - \hat{S}} \quad (6)$$

where all the symbols are as defined above.

The final SIR estimate is the sum of all antennawise estimates \hat{SIR} from equation (6).

20

The SIR estimation with wideband interference estimate is computationally not very complex. Complexity of wideband interference estimation increases directly proportional only to the number of receiver antennas. Only one value P_w per antenna is to be calculated and can be used for every connection (code channel) and every multipath. So, this method allows a simple implementation. A further advantage of this method is that only a small variance occurs.

25

However, a major drawback of this method is the biasing on very high bit rates, making it almost useless with high bit rates signal connections (approaching 2 Mb/s). The

orthogonal share of the signal power should be removed from the wideband noise, but in real case neither the power ratio nor the orthogonality coefficient are unfortunately known. Because the orthogonal data channel power is not removed, in the equation (6), the numerator remains too small and the denominator too big. Thus SIR estimate remains too small, and the error grows with high SIR values and high bit rates. With high SIR values, noise power becomes small and unremoved share of the signal power starts to play an important role in wideband noise estimate. With high bit rates, power ratio becomes very small. Thus, the unremoved share of the signal power becomes remarkable.

10 2. SIR estimation with narrowband interference estimate:

The signal to interference ratio is described by the following equation:

$$SIR = \frac{S}{I}$$

where

- S is the received signal power of a DPCCH channel,
- 15 - I is the interference power including the system thermal noise (measured from the narrowband signal).

Here again, equation (7) needs the estimation of the signal power and the interference power.

20

The signal power is calculated according to the above equation (2). It has to be noted that the signal power estimate \hat{S} is biased. The bias can be removed after the antennawise noise and interference power is estimated. The unbiased signal power estimate is

$$\hat{S}_{ub} = \sum_{k=1}^L \left| \frac{1}{N_p} \sum_{i=1}^{N_p} z_{k,i} \right|^2 - \left(\frac{L \cdot I}{N_p} \right). \quad (8)$$

In the minimum variance unbiased (MVU) estimation method, the noise and interference power is estimated from the narrowband received, despread and demodulated signal $z_{k,i}$.

5 The rationale behind this is as follows: Under the assumption that the power of the transmitted narrowband signal and the channel power stay constant for the calculation period (one timeslot) the variance of the received signal is actually equal to the variance of the noise and interference. For additive white Gaussian noise (AWGN) and interference, this in turn equals to the power of the noise and the interference.

10 It must be noted that here two assumptions have been made, one about the transmitted signal power, and another about the channel power. Since the transmit power control (TPC) period is one timeslot, the first assumption is right; the transmitted signal power stays constant over the calculation period. The validity of the second assumption depends on the channel, and the biggest error from the ideal situation would be for a fading channel with a very high Doppler frequency, so that the channel power changes
15 significantly over one timeslot.

By definition variance is

$$\hat{\sigma}^2 = E(|X - E(X)|^2), \quad (9)$$

but it can be also calculated by

$$\hat{\sigma}^2 = E(|X|^2) - |E(X)|^2. \quad (10)$$

20 $|E(X)|^2$ has already been calculated in the above equation (2) since the term $E(|X|^2)$ corresponds to

$$\frac{1}{N_p} \cdot \sum_{i=1}^{N_p} z_{k,i} \cdot z_{k,i}^*, \quad (11)$$

25 where $z_{k,i}^*$ is the complex conjugate of the despread and demodulated pilot symbol.

The estimate of the interference and noise power of finger k can be now written by substituting equation (11) and

$$\text{term } \hat{S}_k = \left| \frac{1}{N_p} \sum_{i=1}^{N_p} Z_{k,i} \right|^2$$

from equation (8) to equation (10)

$$\hat{I}_k = \left(\frac{1}{N_p} \cdot \sum_{i=1}^{N_p} Z_{k,i} \cdot Z_{k,i}^* \right) - \hat{S}_k \quad (12)$$

To reduce the variance of the interference and noise power estimate

$$\hat{I} = \frac{1}{L} \cdot \sum_{k=1}^L \hat{I}_k \quad (13)$$

of a current antenna, it is filtered using a 1-tap IIR filter with effective length of 4 timeslots, resulting in the following equation:

$$\hat{I}_{\text{filt}}(t) = \kappa \cdot \hat{I}(t) + (1 - \kappa) \cdot \hat{I}(t-1) \quad (14)$$

Here time index t refers to a current timeslot and (t - 1) to a previous timeslot. (mark $\hat{I}_{\text{filt}} = \hat{I}_{\text{filt}}(t)$). The Kalman gain κ of the filter should be 0.25.

So, the SIR estimate for one antenna is calculated by the following equation

$$\hat{SIR} = \frac{\hat{S}_{ub}}{\hat{I}_{filt}} = \frac{\sum_{k=1}^L \hat{S}_k - (L \cdot \hat{I}_{filt} / N_p)}{\hat{I}_{filt}}, \quad (15)$$

where all the symbols are as defined above.

5

The final SIR estimate is sum of all antennawise estimates \hat{SIR} from equation (15).

The narrowband interference based SIR estimation doesn't have any biasing problems described above in conjunction with the wideband interference estimate.

10

However, it is computationally more complex than the above mentioned wideband interference method. Complexity of interference estimate increases directly proportional to the number of receiver antennas, number of connections (code channel), number of received paths per connection (different delays) and number of pilot bits. A further drawback is that the narrowband interference estimate has a high variance so that a high effort filtering is required which takes a certain time, but filtering causes error in case of a very fast fluctuation of the interference level; the latter case would be for example the presence of an other user in the same cell with a package data connection (CPCH).

15

20

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method and a device for SIR estimation which are suitable for processing of signals having different characteristics, in particular of first signals having a high bit rate and of second signals having a low bit rate, wherein the above mentioned drawbacks are essentially overcome and in particular wherein the

computing load is reasonable low and a good quality of SIR estimate is maintained for all signals to be processed.

5 In order to achieve this and other objects, in accordance with a first aspect of the present invention, there is provided a method for estimating the signal to interference ratio of a signal, in particular in a base station of a WCDMA system, providing at least a first estimating process and a second estimating process, wherein for current use with the signal a selection among said estimating processes is made in accordance with the current characteristic(s) of said signal so that an estimating process is selected which is
10 most suitable in view of the current characteristic(s) of said signal.

In accordance with a second aspect of the present invention, there is provided a device for estimating the signal to interference ratio of a signal, in particular in a base station of a WCDMA system, comprising at least a first estimating means for carrying out a first
15 estimating process and a second estimating means for carrying out a second estimating process, a detecting means for detecting the current characteristic(s) of said signal, and a selecting means for selecting an estimating means which is most suitable in view of the current characteristic(s) of said signal detected by said detecting means.

20 Accordingly, the present invention proposes the alternative use of a plurality of different estimators, wherein the basis for choosing the most suitable estimator is the current characteristic(s) of the signal to be processed. So, by selecting the most suitable estimating process in view of the current characteristic(s) of the signal, the estimating process can be 'adapted' to the current signal such that good quality of the SIR estimate can be maintained and e. g. further the required computing load can be kept reasonable
25 low. Namely, when the current characteristic(s) is (are) changed, the estimating process is changed, accordingly, and, when the new current characteristic(s) of the signal has (have) been detected, another estimating process among the plurality of estimating processes is selected which is then most suitable in view of the new current characteristic(s) of the signal. It has been found for most applications that a possible delay
30 between the change of the current characteristic(s) of the signal and the change of the

estimating process doesn't matter, because the SIR estimate has anyway a lot of variance from timeslot to timeslot. Therefore, the present invention is very useful in processing signals having different characteristics.

- 5 Further advantageous embodiments are defined in the dependent claims.

10 Usually, the first estimating process comprises a wideband interference estimation calculated from the wideband signal, i. e. the signal before despread, and said second estimating process comprises a narrowband interference estimation calculated from the narrowband signal, i. e. the signal after despread. When small variance is wanted and the biasing is not relevant, the wideband interference estimation should be selected. However, when the biasing becomes a problem, the narrowband interference estimation should be selected.

- 15 A current characteristic may comprise a bit rate of said signal so that the basis for choosing the estimator is the bit rate. In a preferred embodiment, said first estimating process is used when said signal has a low bit rate, and said second estimating process is used when said signal has a high bit rate.

- 20 Further, a current characteristic may also comprise the kind of said signal, wherein preferably said signal can comprise a speech signal or a data signal. In a preferred embodiment, said first estimating process is used when said signal comprises a speech signal, and said second estimating process is used when said signal comprises a data signal.

25

In a still further preferred embodiment, said first estimating process is used when said signal comprises a speech signal or a data signal having a low bit rate, and said second

estimating process is used when said signal comprises a data signal having a high bit rate.

5 So, the present invention is very advantageous to be used in telecommunication systems, in particular radio links of a WCDMA system. In such a system, there can be simultaneously many speech connections having a low bit rate, but only a few data connections having a high bit rate in one cell or sector of such a system. This comes from the high interference level caused by high bit rate connections. Other limits for many high bit rate connections could be decoding resources in the receivers of such systems. So, 10 the wideband interference estimation process is a good choice for speech, and the narrowband interference estimation process is a good choice for data connections. I. e. the SIR estimate based on narrowband interference is used with data connections, and the SIR estimate based on wideband interference is used with speech connections. This balances the computing load and keeps the SIR estimate unbiased. Before a connection 15 is made, the bit rate is detected, and the suitable estimation process can be chosen. If the bit rate is changed during the connection, the estimation process can be changed when the new bit rate is detected. Finally, data connections with lowest bit rate could also be switched to use the wideband interference estimation process if the signal processing resources are getting low. A possible delay between the change of the bit rate and the 20 change of the estimation process doesn't matter, because the SIR estimate has anyway a lot of variance from timeslot to timeslot.

25 However, further selection criteria can be used for selecting the most convenient estimating process. For instance, the spreading factor of the DPDCH channel can be used as an alternative or additional selection criterion, if a spreading factor detection algorithm is implemented wherein the characteristic of the signal is updated once in a timeslot.

BRIEF DESCRIPTION OF THE DRAWING

In the following, the present invention will be described in greater detail based on a preferred embodiment with reference to the accompanying figure in which a preferred embodiment of a device for SIR estimation is shown.

5

DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention will now be described on the basis of the enclosed only figure.

10

The device for SIR estimation shown in the enclosed figure comprises an input terminal 2 which is connected to the input of a detection circuit 4. The output of the detection circuit 4 is coupled to a selection circuit 6.

15

There are provided a plurality of estimation circuits which are coupled to the outputs of the selection circuit so that the number of estimation circuits corresponds to the number of the outputs of the selection circuit. The present embodiment as shown in the enclosed figure comprises two estimation circuits, namely a first estimation circuit 8 coupled to a first output of the selection means 6 and a second estimation circuit 10 coupled to a second output of the selection circuit 6. Each output of the estimating circuits 8, 10 is connected to a common output terminal 12.

20

In the present embodiment as shown in the enclosed figure, the first estimation circuit 8 is provided for carrying out a SIR estimation with a wideband interference estimation, and the second estimation circuit 10 is provided for carrying out a SIR estimation with a narrowband interference estimation.

25

The current characteristics of the signal inputted at the input terminal 2 is detected by the detection circuit 4. In accordance with the detection result of the detection circuit 4, the selection circuit 6 activates either the first estimation circuit 8 or the second estimation circuit 10. The result of either the first estimation circuit 8 or the second estimation circuit 10 is outputted as SIR estimate value at the output terminal 12.

In the preferred embodiment, the signal is either a speech signal having a low bit rate or a data signal having a high bit rate in a telecommunication system e. g. comprising a WCDMA system. Accordingly, the detection circuit 4 is provided to detect the bit rate, and the selection circuit 6 is provided either to activate the first estimation circuit 8 when the signal is a speech signal or to activate the second estimation circuit 10 when the signal is a data signal with a high bit rate. Although data signals in telecommunication systems usually have a high bit rate, data signals can also be processed by the first estimation circuit 8 in case they are data signals with lowest bit rate if the signal processing resources are getting low.

However, further selection criteria can be used for selecting the most convenient estimating process. For instance, the spreading factor of the DPDCH channel can be used as an alternative or additional selection criterion, if a spreading factor detection algorithm is implemented wherein the characteristic of the signal is updated once in a timeslot.

In telecommunication systems the preferred embodiment shown in the enclosed figure is used for detecting and signalling the bit rate and accordingly to choose the correct SIR estimation method before the connection is made. If the bit rate is changed during the connection, the SIR estimation method can be changed by the selection circuit 6 when the new bit rate is detected by the detection circuit 4.

Although the preferred embodiment shown in the enclosed figure is described as being used in telecommunication systems, it might be also useful for other applications. Further, although the preferred embodiment comprises two estimation circuits only, the number of such circuits is not limited thereto, but can be more than two if required.

5

Although the present invention has been fully described in connection with the preferred embodiment thereof with reference to the accompanying figure, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the spirit and scope of the present invention as defined by the appended claims unless they depart therefrom.

10

CLAIMS

1. A method for estimating the signal to interference ratio of a signal, in particular in a base station of a WCDMA system, providing at least a first estimating process and a second estimating process, wherein for current use with the signal a selection among said estimating processes is made in accordance with a current characteristic or current characteristics of said signal so that an estimating process is selected which is most suitable in view of the current characteristic(s) of said signal.
2. The method of claim 1, wherein said first estimating process comprises a wideband interference estimation calculated from the wideband signal, i. e. the signal before despreading, and said second estimating process comprises a narrowband interference estimation calculated from the narrowband signal, i. e. the signal after despreading.
3. The method according to claim 1 or 2, wherein a current characteristic comprises a bit rate of said signal.
4. The method of claim 3, wherein said first estimating process is used when said signal has a low bit rate, and said second estimating process is used when said signal has a high bit rate.
5. The method of at least any one of the preceding claims, wherein a current characteristic comprises the kind of said signal.
6. The method of claim 5, wherein said signal can comprise a speech signal or a data signal.
7. The method of claim 6, wherein said first estimating process is used when said signal comprises a speech signal, and said second estimating process is used when said signal comprises a data signal.

8. The method of the claims 4 and 6, wherein said first estimating process is used when said signal comprises a speech signal or a data signal having a low bit rate, and said second estimating process is used when said signal comprises a data signal having a high bit rate.

5

9. A device for estimating the signal to interference ratio of a signal, in particular in a base station of a WCDMA system, comprising at least a first estimating means (8) for carrying out a first estimating process and a second estimating means (10) for carrying out a second estimating process, a detecting means (4) for detecting a current
10 characteristic or current characteristics or said signal, and a selecting means (6) for selecting an estimating means (8; 10) which is most suitable in view of the current characteristic (s) of said signal detected by said detecting means (4).

10. The device of claim 9, wherein said first estimating means (8) is provided for
15 carrying out a wideband interference estimation calculated from the wideband signal, i. e. the signal before despread, and said second estimating means (10) is provided for carrying out a narrowband interference estimation calculated from the narrowband signal, i. e. the signal after despread.

20 11. The device of claim 9 or 10, wherein said detecting means (4) detects a bit rate of said signal as a current characteristic.

12. The device of claim 11, wherein said selecting means (6) selects said first
estimating means (8) when said detecting means (6) detects a low bit rate of said signal,
25 and said second estimating means (10) when said detecting means (6) detects a high bit rate.

13. The device of at least any one of the claims 9 to 12, wherein said detecting means
(4) detects the kind of said signal as a current characteristic.

30


14. The device of claim 13, wherein said detecting means (4) detects whether said
signal comprises a speech signal or a data signal

15. The device of claim 14, wherein said selecting means (6) selects said first estimating means (8) when said detecting means (4) detects that said signal comprises a speech signal, and said second estimating means (10) when said detecting means (4) detects that said signal comprises a data signal.

5

16. The device of claims 11 and 14, wherein said selecting means (6) selects said first estimating means (8) when said detecting means (4) detects that said signal comprises a speech signal or a data signal having a low bit rate, and said second estimating means (10) when said detecting means (4) detects that said signal comprises a data signal

10 having a high bit rate.

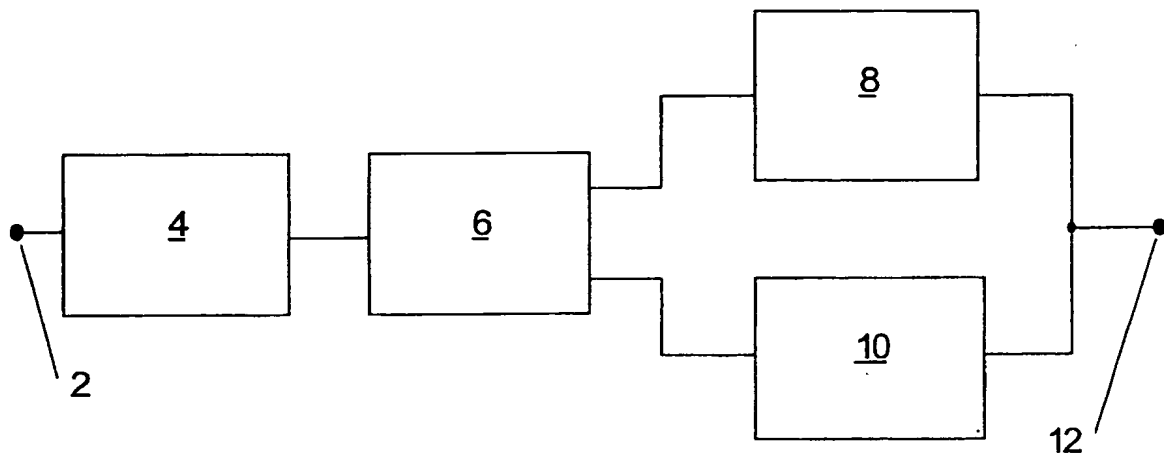

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/04622

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 28124 A (ERICSSON TELEFON AB L M) 19 April 2001 (2001-04-19) page 4, line 23 - line 28 ---	1,9
A	EP 1 033 824 A (NIPPON ELECTRIC CO) 6 September 2000 (2000-09-06) page 2, line 16 -page 3, line 31 ---	1-16
A	WO 00 77946 A (NOKIA NETWORKS OY ;HORNEMAN KARL (FI); KINNUNEN PASI (FI); PAJUKOS) 21 December 2000 (2000-12-21) page 1, line 14 -page 3, line 33 --- -/--	1-16

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

6 December 2001

Date of mailing of the international search report

07 01 2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bo Gustavsson

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/04622

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>CHIH-WEI WANG: "Signal to interference ratio measurement techniques for CDMA cellular systems in a frequency-selective multipath fading channel"</p> <p>THIRD IEEE SIGNAL PROCESSING WORKSHOP ON SIGNAL PROCESSING ADVANCES IN WIRELESS COMMUNICATION,</p> <p>20 - 23 March 2001, pages 34-37,</p> <p>XP002902190</p> <p>Taoyuan, Taiwan</p> <p>the whole document</p> <p>-----</p>	1-16

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/04622

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0128124	A	19-04-2001	GB 2355366 A	18-04-2001
			AU 7912500 A	23-04-2001
			WO 0128124 A1	19-04-2001

EP 1033824	A	06-09-2000	JP 2000252952 A	14-09-2000
			CN 1265490 A	06-09-2000
			EP 1033824 A2	06-09-2000

WO 0077946	A	21-12-2000	WO 0077946 A1	21-12-2000
			AU 4608799 A	02-01-2001
